

CAST

ALTERA®

LIN

Controller Megafunction

The LIN megafunction is a communication controller that transmits and receives complete LIN frames to perform serial communication according to the LIN Protocol Specification 2.0. It uses a single master/multiple slave concept for message transfer between nodes of the LIN network. The LIN can be implemented as a master or as a slave. The message transfer can be controlled via a micro controller interface and a LIN transceiver is needed for the connection to the LIN bus.


The LIN is a microcode-free design developed for reuse in ASIC and FPGA implementations. The design is strictly synchronous with positive-edge clocking and no internal tri-states.

Applications

The LIN megafunction can be utilized for a variety of applications including;

- low cost automotive networks
- interfaces for sensors and actuators

Block Diagram

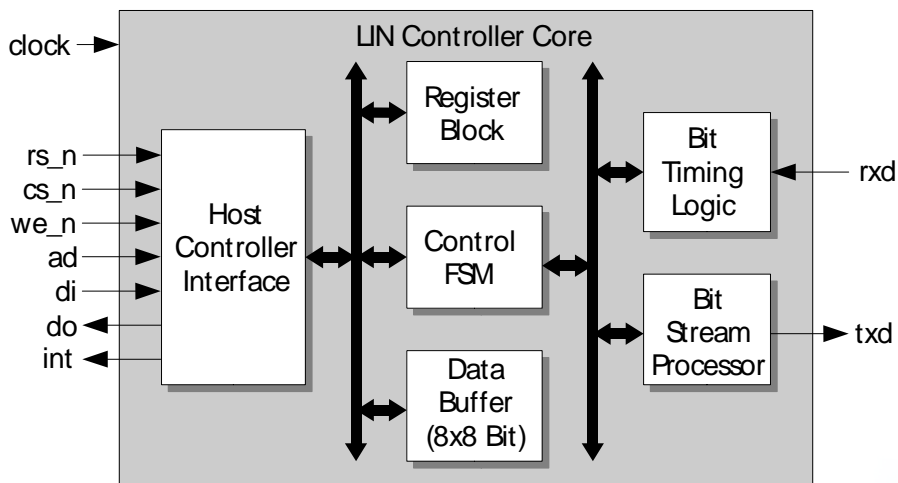

Features

- Support of LIN specification 2.0
- Programmable data rate between 1 Kbit/s and 20 Kbit/s
- 8-byte data buffer
- 8-bit host controller interface
- Configurable for support of master or slave functionality
- Slave can be implemented with or without clock synchronization
- Fully synchronous design, available in VHDL or Verilog, completely synthesizable
- The LIN Controller synthesizes to approximate 3000 gates

Functional Description

The LIN megafunction is partitioned into modules as shown in the block diagram.

Host Controller Interface

This interface is responsible for handling the communication with the host controller of the system.

Register Block

The Register Block provides control registers and status registers to control the LIN message transfer. Access to the registers is possible via the host controller interface.

Data Buffer

The 8-byte Data Buffer stores the data that has to be sent with the current LIN frame or the data that has been received with the last LIN frame. Access to the Data Buffer is possible via the host controller interface.

Control FSM

The finite control state machine is responsible for the behavior of the megafunction depending on host controller commands and bus activity. It generates and processes the LIN frame fields according to the LIN protocol.

Bit Stream Processor

This module converts the data stream from parallel to serial (from transmit buffer to bus) and from serial to parallel (from bus to receive buffer).

Bit Timing Logic

The Bit Timing Logic is responsible for synchronizing the received data stream from the bus with the internal bit time clock.

Implementation Results

LIN reference designs have been evaluated in a variety of technologies. The following are sample Altera results.

Supported Family	Utilization			Performance F_{max}
	LEs	Memory	Memory bits	
Cyclone EP1C20-6	706	-	-	138 MHz
Stratix EP1S20-5	706	-	-	137 MHz
Stratix-II EP2S60-3	627	-	-	192 MHz

Note: results optimized for speed

Megafunction Modifications

The LIN megafunction can be modified to include an acceptance filter. With that, a simple LIN slave that transmits response frames for only one identifier could be realized without host controller.

Please contact CAST, Inc. directly for any required modifications.

Support

The megafunction as delivered is warranted against defects for ninety days from purchase. Thirty days of phone and email technical support are included, starting with the first interaction. Additional maintenance and support options are available.

Verification

The megafunction has been verified through extensive simulation and rigorous code coverage measurements

Deliverables

The megafunction includes everything required for successful implementation:

Netlist License

- Post-synthesis EDIF netlist
- Testbench (self checking)
- Place & Route Scripts
- Documentation

HDL Source License

- VHDL or Verilog RTL source code
- Testbenches (self checking)
- Wrapper for pin compatible replacement
- Simulation & synthesis scripts
- Documentation