



PCI-T32MF

Multi-Function PCI Target Interface Megafunction

The PCI-T32MF implements a target-only PCI interface compliant with the PCI 2.3 specification. It supports a 32-bit address/data bus and operates up to 33 MHz (PCI clock).

The megafunction offers one to eight independent PCI functions in a single chip, each implementing 64 to 256 bytes of PCI Configuration Space registers as required. Each function supports up to six Base Address Registers, with both I/O and Memory space decoding from 16 bytes up to 4GB.


The megafunction was developed for easy reuse with ASICs or FPGAs.

Applications

The PCI-T32MF can be utilized for a variety of PCI interface applications including:

- PCI I/O communication boards
- PCI Data Acquisition Boards
- Embedded system PCI applications

Block Diagram

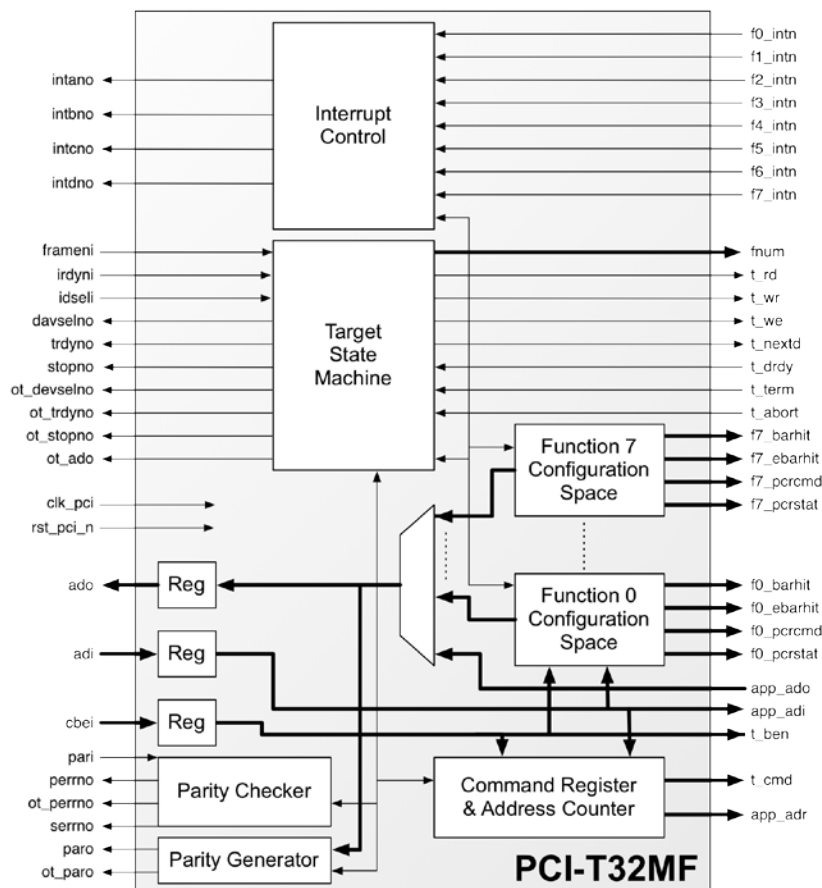

Features

- Fully compliant with the PCI Local Bus Specification, Revision 2.3.
- 33 MHz performance (PCI clock frequency)
- 32-bit datapath
- Full Target functionality, with support for these commands:
 - Configuration Read, Configuration Write
 - Memory Read, Memory Write, Memory Read Multiple (MRM), Memory Read Line (MRL), Memory Write and Invalidate (MWI)
 - I/O Read, I/O Write
- Zero wait states burst mode
- Support all interrupt pins (INTA#, INTB#, INTC#, INTD#)
- Type 0 Configuration space
- Supports all Base Address Registers
- Supports backend initiated target retry, disconnect and abort
- Parity generation and parity error detection
- Silicon-verified

Functional Description

As shown in the PCI Interface Architecture diagram, the PCI-T32MF32 includes five major blocks: Parity Generator, Parity Checker, up to eight Configuration Spaces, Interrupt control, Command Register and Address Counter block, Target State Machine.

Parity Generator

The parity generator generates parity during read transaction.

Parity Checker

The parity checker checks parity during command phase and write transaction.

Configuration Spaces

The PCI-T32MF contains up to eight configuration spaces depending on the megafunction setup. Configuration space register block implements the mandatory 64 bytes of PCI Configuration Space registers.

Command Register and Address Counter block

Command Register saves a transaction command at the beginning of PCI transaction. Address Counter block generates a backend address. Address counter is controlled by Target FSM.

Target FSM

Target State Machine is a control block of the PCI-T32MF interface. The state machine is in charge of handling PCI transactions protocol.

Support

The megafunction as delivered is warranted against defects for ninety days from purchase. Thirty days of phone and email technical support are included, starting with the first interaction. Additional maintenance and support options are available.

Verification

The megafunction has been verified through extensive simulation and rigorous code coverage measurements.

Implementation Results

PCI-T32MF reference designs have been evaluated in a variety of technologies. The following are sample Altera results.

Altera Device	LEs	Memory	DSP	I/Os	Fmax (MHz)	Quartus
Cyclone-III EP2C20-6	553	-	-	51	33	8.1

Deliverables

The megafunction is available in ASIC (synthesizable HDL) and FPGA (netlist) forms, and includes everything required for successful implementation. The Altera version includes:

- Post-synthesis EDIF netlist
- Sophisticated HDL Testbench including vectors and expected results
- Simulation script, vectors, expected results, and comparison utility
- Place and route script
- Comprehensive user documentation, including detailed specifications and a system integration guide